


## ATR-6912P 800N DC ATOMS PRO GARAGE DOOR OPENER Residential Door/Opener Applications



Three-Button Remote  
MM-318-3

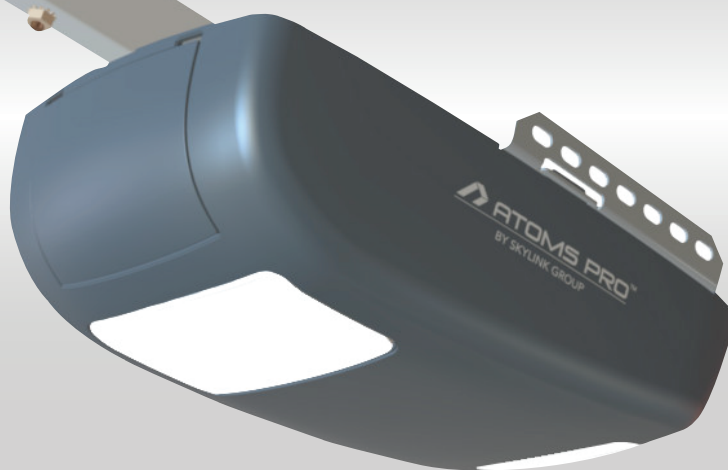

Wall Console  
WB-350



Safety Beam sensor  
ID-001



1 Piece Solid Rail  
(Chain/Belt)

## PERFORMANCE



### Dual Built-in LED Lights

No light bulb to replace as the lifetime LED light is built-in to the opener.



### DC Motor

Ensures extremely quiet and powerful operation.



### Built-in Battery Backup Compatible

The backup battery (sold separately) allows you to operate your garage door opener during the power outage.



### Diagnostic Display

Shows current status during programming and system error.

## CONNECTIVITY



### Wi-Fi Compatible

Compatible with Skylink Wi-Fi Stick (sold separately) and Obit Home App.



### Monitor Door Status

Receives Push Notification on your Smartphone when garage door opener is activated.



### Operate Door Remotely with Obit Home App

Remotely Open and close the garage door.

## SAFETY AND SECURITY



### Rolling code

Encrypted code is generated with every remote activation.



### Passcode Protected Remote Control

Enable the passcode feature to unlock the remote control. (Only for 3-button remote).



### Tamper Proof Trolley

Tamper-Proof trolley design provides peace of mind and added security to prevent forcible entry.



### Automatic Door Close Timer

Programmable timer to close the door automatically.



### Visual / Audio Alert

Flashing light and beeping alert when the door is about to close on Automatic Door Close Timer Mode.

# Optional Accessories



Wireless Wall Console



Wireless Safety Sensors



Skylink Orbit Home Smart Phone Control



Built-in Backup Battery



Keyless Entry System



Keychain / Visor Remotes



## STANDARD SPECIFICATION

### DIMENSIONS

Installed Length

- 7' Rail 123"
- 8' Rail 135"
- 10' Rail 159"

Maximum Lifting weight:

-1200N/ 1-1/4HPF: 90lbs

Maximum Door Opening:

- 7' max 7'6"
- 8' max 8'6"
- 10' max 10'6"

Min. Headroom Clearance Required:

-Belt: 2" Chain : 2"

### MM-REMOTE CONTROL

Rolling Code Technology

Operating Range: 300'(Open Area )

Operating Temperature: -22F to 150F

Battery: 3-Volt Lithium

Frequency: 318 MHz

### CARTONS

Number of Cartons:2

Carton1: Dimensions and Contents:

- 20-1/2" x 8-1/2" x 11-1/2"
- Garage Door Opener Head
- WB-350,Wall Console
- MM-318-3,1xThree-Button Remote Control
- Photo-eye Safety reversing system
- Instruction/Maintenance manual

Carton 2 : Dimensions and Contents:

- 7' Rail,117" x 4" x 4.1"
- 8' Rail,130" x 4" x 4.1"
- 10 Rail,153" x 4" x 4.1"

Assembled Solid Rectangular Tube Rail

With pre-wrapped chain or belt and attached front pulley.

### CONVENIENCE / SAFETY

Auto Force: - Down travel safety reversing sensor.

- Up travel safety stop sensor.

Emergency / Quick Release

Automatic Trolley Reconnect

Photo-eye; Beam Obstructed

Lights on; Door Open / Close

In-car Remote Compatible

Wall control or Remote activation during door travel.

- Stop Door for Ventilation

Orbit Home Compatible -Smartphone Control

The MM- Remote will only transmit the signal for 3 seconds to prevent battery drain in case the button is accidentally held down.

## ELECTRICAL SPECIFICATION

### POWER

Voltage: 120V AC, 60Hz

Operation Rating: 120W

Current Rating:1.2A, Maximum 2A

Standard Listings: ETL ( Conforms to UL STD .325)

Length of Line Cord: 5'(3-prong)

### LIGHTING

Built-in LED

Maximum Wattage: 12W+5W

Lumens: 2200 lm

Length of Light Delay: 3 Minutes

Type of Light Delay: Solid-State

## MECHANICAL SPECIFICATION

### MOTOR

18V DC Motor

800N, 3/4HPf equivalent

RPM: 1,852

Thermal Protection: Automatic

Lubrication: Permanent

### DRIVE MECHANISM

Drive Means: Full Reinforced Drive Belt or Heavy Duty Chain.

Reduction Means:Gear 16:1

Door Linkage: Adjustable Door Arm

### ADJUSTMENTS

Auto Force

Electronic Limit Settings

### TRAVEL RATE

Approximately 8" per Seconds

### SHIPPING WEIGHTS

Head:17lbs

Belt Rail: 7' 12lbs, 8'13lbs

10' 15lbs

Chain Rail: 7' 14lbs, 8' 15lbs,

10' 18lbs

### MATERIALS

Chassis: Steel

Chassis Cover: Plastic

Rail: Rolled Steel

Trolley: Plastic

### WARRANTY

Lifetime Motor Warranty

5 years parts Warranty

Lifetime Belt Warranty

1 Year Accessories Warranty