


ATR-6912P 1-1/4 HPf DC ATOMS PRO GARAGE DOOR OPENER Residential Door Opener Applications



Three-Button Remote
MM-318-3

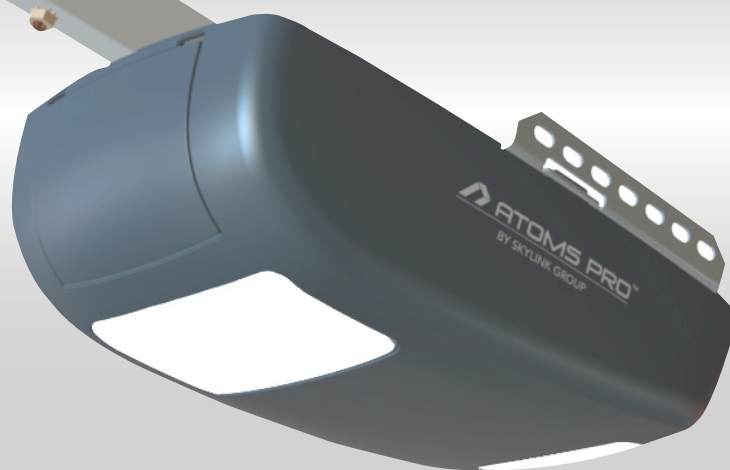

Wall Console
WB-350



Safety Beam sensor
ID-001



1 Piece Solid Rail
(Chain/Belt)

PERFORMANCE



Dual Built-in LED Lights

No light bulb to replace as the lifetime LED light is built-in to the opener.



DC Motor

Ensure extremely quiet and powerful operation.



Built-in Backup Battery Compatible

The backup battery (sold separately) allows you to operate your garage door opener during power outage.



Diagnostic Display

Show current status during programming and system error.

CONNECTIVITY



Wi-Fi Compatible

Compatible with Skylink Wi-Fi Stick (sold separately) and Obit Home App.



Monitor Door Status

Receive Push Notification on your Smartphone when garage door opener is activated.



Operate Door Remotely with Obit Home App

Remotely Open and close the garage door.



Live Video Surveillance

View and record any activity in the garage with Obit Home App and optional camera (WC400PHB sold separately)

SAFETY AND SECURITY



Rolling code

Encrypted code is generated with every remote activation.



Passcode Protected Remote Control

Enable the passcode feature to unlock the remote control. (Only for 3-button remote).



Tamper Proof Trolley

Tamper-Proof trolley design provides peace of mind and added security to prevent forcible entry.



Automatic Door Close Timer

Programmable timer to close the door automatically.



Visual / Audio Alert

Flashing light and beeping alert when the door is about to close on Automatic Door Close Timer Mode.

Optional Accessories



Wireless Wall Console



Wireless Safety Sensors



Skylink Orbit Home Wi-Fi Adapter



Backup Battery



Keypad



Keychain / Visor Remotes



STANDARD SPECIFICATIONS

DIMENSIONS

Installed Length

- 7' Rail 123"
- 8' Rail 135"
- 10' Rail 159"

Maximum Lifting weight:

- 1200N / 1-1/4HPf: 90lbs

Maximum Door Opening:

- 7' max 7'6"
- 8' max 8'6"
- 10' max 10'6"

Min. Headroom Clearance Required:

- Belt: 2" Chain : 2"

MM-REMOTE CONTROL

Rolling Code Technology

Operating Range: 300'(Open Area)

Operating Temperature: -22F to 150F

Battery: 3-Volt Lithium

Frequency: 318 MHz

CARTONS

Number of Cartons:2

Carton1 :Dimensions and Contents:

- 20-1/2" x 8-1/2" x 11-1/2"
- Garage Door Opener Head
- WB-350,Wall Console
- MM-318-3,1xThree-Button Remote Control
- Photo-eye Safety reversing system
- Instruction/Maintenance manual

Carton 2 : Dimensions and Contents:

- 7' Rail,117" x 4" x 4.1"
- 8' Rail,130" x 4" x 4.1"
- 10 Rail,153" x 4" x 4.1"

Assembled Solid Rectangular Tube Rail with pre-wrapped chain or belt and attached front pulley.

CONVENIENCE / SAFETY

Auto Force: - Down travel safety reversing sensor
- Up travel safety stop sensor

Emergency Quick Release

Automatic Trolley Reconnect

Photo-eye Beam Obstructed Auto Reverse

Lights on Door Open / Close

In-car Remote Compatible

Wall control or Remote activation during door travel to stop door for ventilation

Orbit Home Compatible -Smartphone Control

The Remote will only transmit the signal for 3 seconds to prevent battery drain in case the button is accidentally held down

ELECTRICAL SPECIFICATIONS

POWER

Voltage: 120V AC, 60Hz

Operation Rating:120W

Current Rating:1.2A, Maximum 2A

Standard Listings: ETL (Conforms to UL STD.325)

Length of Line Cord: 4' (3-prong)

LIGHTING

Built-in LED

Maximum Wattage: 12W+5W

Lumens: 2200 lm

Length of Light on Delay: 3 Minutes

Type of Light Delay: Solid-State

MECHANICAL SPECIFICATIONS

MOTOR

18V DC Motor

1200N, 1-1/4HPf equivalent

RPM: 1,852

Thermal Protection: Automatic

Lubrication: Permanent

DRIVE MECHANISM

Drive Means: Steel Reinforced Belt or Heavy Duty Chain.

Reduction Means:Gear 16:1

Door Linkage: Adjustable Door Arm

ADJUSTMENTS

Auto Force

Electronic Limit Settings

TRAVEL RATE

Approximately 8" per second

SHIPPING WEIGHTS

Head:17lbs

Belt Rail: 7' 12lbs, 8'13lbs

10' 15lbs

Chain Rail: 7' 14lbs, 8' 15lbs,

10' 18lbs

MATERIALS

Chassis: Steel

Chassis Cover: Plastic

Rail: Rolled Steel

Trolley: Plastic

WARRANTY

Lifetime Motor Warranty

5 years parts Warranty

Lifetime Belt Warranty

1 Year Accessories Warranty